TOOTENIMETUS	SOODUS	HIND
Ð?Ð¼Ñ?Ð¿Ñ?Ñ• Ð·Ð°Ð¼Ðºð° ABLOY LC130/30,5 Fe/ZL (Ð»ÐµÐ²Ð°Ñ•)	218.44 ?	249.64 ?
Ð?Ð¾Ñ?Ð¿Ñ?Ñ• Ð·Ð°Ð¼Ðºð° ABLOY LC130/35 Fe/ZL (Ð¿Ñ?Ð°Ð²Ð°Ñ•)	218.44 ?	249.64 ?
Ð?Ð¾Ñ?Ð¿Ñ?Ñ• Ð·Ð°Ð¼Ðºð° ABLOY LC130/35 Fe/ZL (Ð»ÐµÐ²Ð°Ñ•)	218.44 ?	249.64 ?
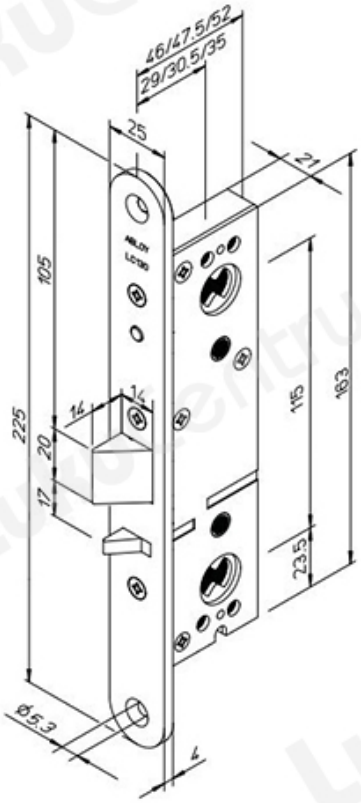
Description: [illegible] ABLOY LC130/30,5 Fe/ZL, manually [illegible] automatic deadlocking when the door is closed. The cylinder and thumbturn which is used more is recommended to be installed higher up. The lock can be fitted with a thumbturn and/or a one sided or a double sided cylinder. The lower cylinder is installed upside down due to the construction of the lock.